

DesirePOS




Ready in X86 Windows


- 15" flat touch screen technology
- Intel® Bay-Trail J1900 / Ivy Bridge B960 / Core™ i3 / i5 processor
- 100% Fan-less design
- Elegant with small foot print design
- Combinations of multi-colors White / Dark Grey





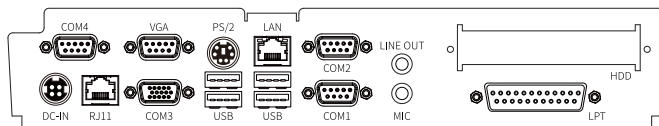



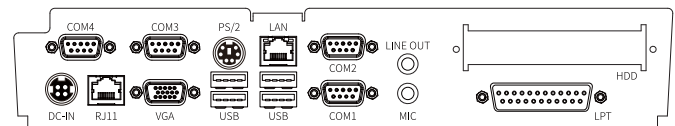




I/O Ports DesirePOS B960 / Ivy Bridge / i7 / i5 / i3 / J1900



I/O Ports DesirePOS D525



System	
CPU Support	Intel® Pentium® Processor B960
	Intel® Ivy Bridge Intel® Core™ i7 / i5 / i3 / Dual Cores CPU
	Intel® Celeron® Processor Bay-Trail J1900 (2M Cache , up to 2.42GHz)
Memory	Support up to 8G DDR3
Core Logic	Intel® HM76 / BayTrail
Net Work	10/100/1000 Base-T Fast Ethernet
Power Supply	12V Power Adaptor
System weight	6.8 kgs (14.98 lbs)
Dimension (WxHxD)	380x 370 x 190 mm
O/S	Windows 7, POSReady 7, Windows 8, Windows 10
Storage	
HDD	1 x 2.5" SATA HDD
SSD	SSD SATA Interface Max.1TB
I/O Ports	
Serial Ports	4 x external COM / 2 x internal COM (w/ +5V, +12V selectable)
USB Ports	4 x external USB Ports
mPCIe	1 x internal
Ethernet	1 x 10/100/1000 Mbps (RJ45)
PS/2	1 x PS/2 keyboard/mouse port
VGA	1 x DB-15 VGA Interface
Parallel Port	1 x DB25
Audio	1 x 2W speaker (Optional)
Cash Drawer	1 x RJ11
DC-IN	12V DC-IN
Power Switch	1 x Power Switch
Display	
LCD	15" TFT LCD Panel
Max. Resolution	1024 x 768
Brightness	250 nits
Touch Screen	5 wires resistive touch panel
Environmental	
Operating Condition	0°C ~ 40°C, 20%RH ~ 90%RH
Storage Condition	-20°C ~ 60°C, 10%RH ~ 90%RH
Safety	
Safety standards	CCC / CE / FCC

Models Features	
	LCD LED Backlight
	Fanless System Design
	Metal Case
	Touch LCD Monitor
Peripheral Options	
	Magnetic Stripe Card
	2nd LCD Display
	VFD Customer Display
	Thermal Printer
	Barcode Scanner
Variety of color choice	
	
Dark Gray	White